


Kinghelm®

REVISIONS				
REV NUMBER	DESCRIPTION	DWN	CHK	DATE
A	DESIGN			

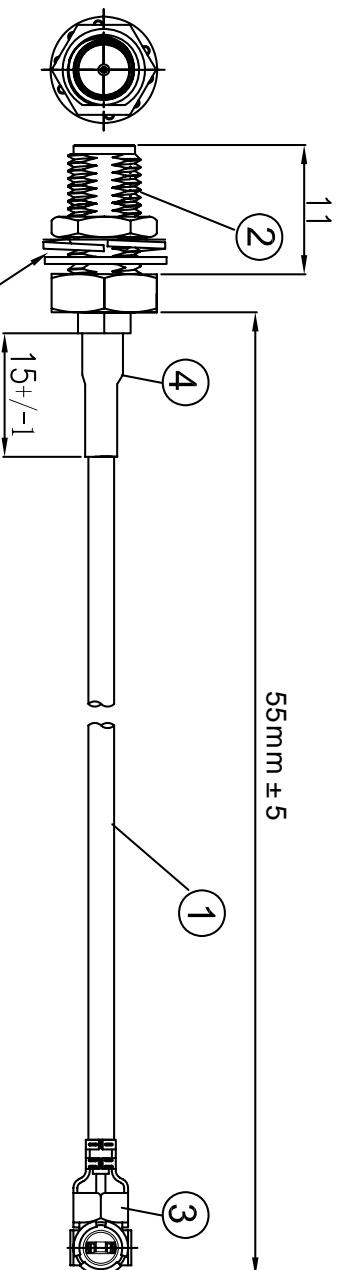

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPENSHORT, MISWIRING AND INTERMITTENT FAILURES
- MATERIAL:
 - SEE TABLE
- MECHANICAL:
 - SMA PULL FORCE: 12.0KGS.
- ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX ,1.13端子, 镀金	1
②	接头	SMA母头内孔, 分体, 11牙, 镀金	1
①	同轴线	RF 1.13 黑色线,OD:1.13mm	AS

深圳市金航标电子有限公司 WWW.BDS666.COM

KHB(RG113)-55-29 0755-83044319

ALL DIMENSION ARE IN MM		DRAWN	DATE	TITLE	
		Jenny	2018/05/04	RF CABLE I-PEX 1.13 TO SMA /F L=55 MM	
COMPUTER GENERATED IN SOLIDWORKS		ENG.		SIZE Number	
DO NOT SCALE THIS DRAWING		MFG.		REV	
PROJECTION		Q.A.		SCALE: Free	
GENERAL TOLERANCE FOR ANGLES ± 1° ± 0.3 ± 0.25 ± 0.150				TYPE	
CUSTOMER PIN:				SHEET 1 OF 1	

A

B

C

D

A

B

C

D