
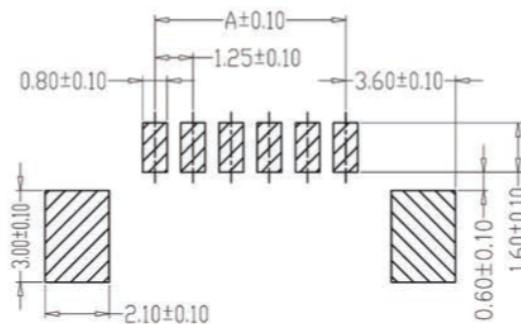


型号: KH-A1251LF-(02-20)A

### SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperatuer Range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance:  $20\text{m}\Omega$  Max
- 5、Insulation Resistance:  $100\text{M}\Omega$  Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer LCP, UL94V-0  
PIN Brass Tin-plated  
Solder tad Brass Tin-plated

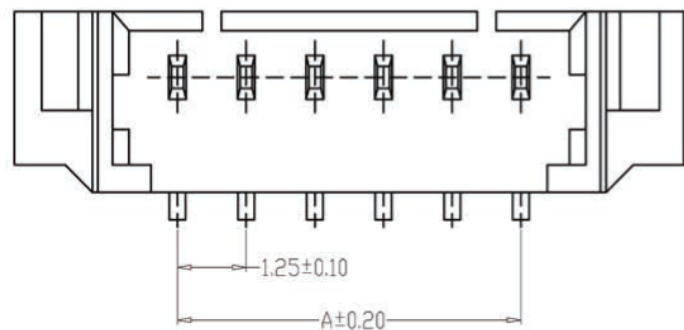

| 编号          | 尺寸 (mm) |       |
|-------------|---------|-------|
|             | A       | B     |
| A1251LF-02A | 1.25    | 7.35  |
| A1251LF-03A | 2.50    | 8.60  |
| A1251LF-04A | 3.75    | 9.85  |
| A1251LF-05A | 5.00    | 11.10 |
| A1251LF-06A | 6.25    | 12.35 |
| A1251LF-07A | 7.50    | 13.60 |
| A1251LF-08A | 8.75    | 14.85 |
| A1251LF-09A | 10.00   | 16.10 |
| A1251LF-10A | 11.25   | 17.35 |
| A1251LF-11A | 12.50   | 18.60 |
| A1251LF-12A | 13.75   | 19.85 |
| A1251LF-20A | 23.75   | 29.85 |

### PCB LAYOUT

| 制图<br>DRAWN | 变更内容<br>DESCRIPTION | 日期<br>DATE | GENERAL TOLERANCE |                 | 制图<br>DRAWING  | 贺骏驹<br>2013.07.01 | 料号<br>PART NO.    | 版本<br>REV. | A                               |
|-------------|---------------------|------------|-------------------|-----------------|----------------|-------------------|-------------------|------------|---------------------------------|
|             |                     |            | $X \pm 0.25$      | $X \pm 2'$      |                |                   |                   |            |                                 |
|             |                     |            | $.X \pm 0.20$     | $.X \pm 1'$     | 核准<br>APPROVAL | 张松强<br>2013.07.05 | 客户料号<br>CUTM. NO. |            |                                 |
|             |                     |            | $.XX \pm 0.15$    | $.XX \pm 0.5'$  | 单位<br>UNITS    | MM                | 比例<br>SCALE       | 1:1        | 深圳市金航标电子有限公司<br>WWW.BDS666.COM  |
|             |                     |            | $.XXX \pm 0.10$   | $.XXX \pm 0.5'$ |                |                   |                   |            | KH-A1251LF-02A<br>0755-83044319 |